

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/22566 A1(51) International Patent Classification⁷: H02P 6/12

(21) International Application Number: PCT/BR00/00105

(22) International Filing Date:
20 September 2000 (20.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI 9904253-3 20 September 1999 (20.09.1999) BR(71) Applicant (for all designated States except US): EM-
PRESA BRASILEIRA DE COMPRESSORES S.A.
- EMBRACO [BR/BR]; Rua Rui Barbosa, 1020,
CEP-89210-901 Joinville, SC (BR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DAINEZ, Paulo,

Sergio [BR/BR]; Rua Rui Barbosa, 1431, Apt. 302,
Bloco I, Joinville, SC (BR). VON DOKONAL, Luiz
[BR/BR]; Rua Visconde de Mauá, 241, Joinville, SC (BR).
SCHWARZ, Marcos, Guilherme [BR/BR]; Rua General
Osório, 257, Joinville, SC (BR).(74) Agent: DANNEMANN, SIEMSEN, BIGLER &
IPANEMA MOREIRA; Rua Marquês de Olinda, 70,
Botafogo, CEP-22251-040 Rio de Janeiro, RJ (BR).

(81) Designated States (national): CN, JP, KR, SG, TR, US.


(84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

[Continued on next page]

(54) Title: A METHOD FOR CONTROLLING AND PROTECTING ELECTRIC MOTORS, A SYSTEM FOR CONTROLLING ELECTRIC MOTORS AND AN ELECTRIC MOTOR SYSTEM

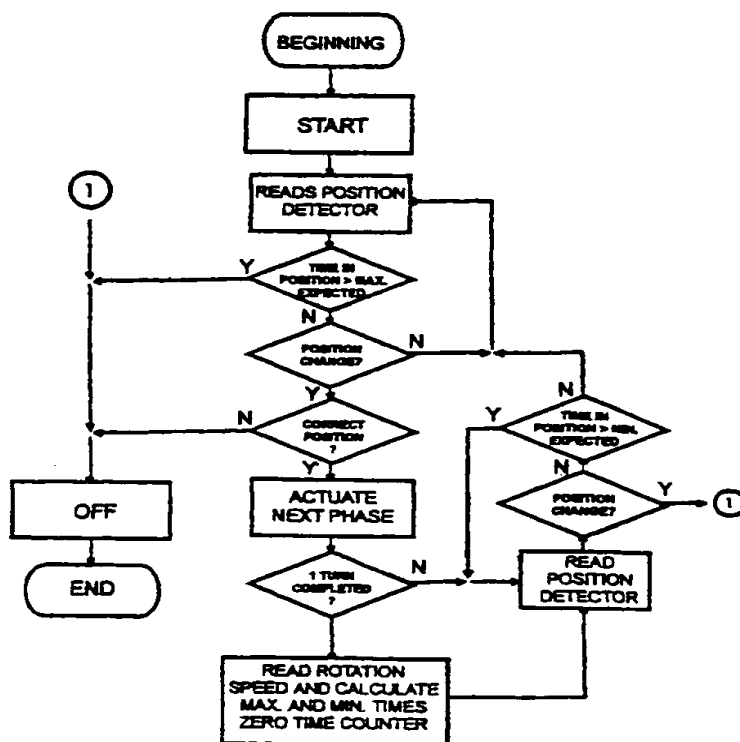

(57) Abstract: A method for controlling and protecting electric motors (10) provided with a rotor, specially permanent magnet motors electronically actuated by a control system (2) comprising a three-phase inverting bridge (5), characterized by being comprised of the step of counting a first period of time, during which said rotor should be between an original position and the next position, and the step of counting a second period of time that follows said first period of time, during which said rotor should pass through said next position. The present invention is also expressed as a control system (2) for an electric motor (10) provided with a rotor, specially a permanent magnet motor, comprising a three-phase inverting bridge (5) and characterized by being additionally comprised of a microcontroller capable of analyzing the positions of the rotor as a function of the time, associated with a counter capable of carrying out the step of counting a first period of time, during which said rotor should be between an original position and the next position, and the stage of counting a second period of time that follows said first period of time, during which said rotor should pass through said next position, as well as an electric motor (1) comprising the control system (2).

WO 01/22566 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**Title: "A METHOD FOR CONTROLLING AND PROTECTING ELECTRIC MOTORS,
A SYSTEM FOR CONTROLLING ELECTRIC MOTORS AND AN ELECTRIC
MOTOR SYSTEM"**

Disclosure of the invention

5 The present invention is directed to a method for controlling and protecting electric motors, specially permanent magnet motors electronically actuated by a control system comprising a three-phase inverting bridge, in which it is required to monitor the position of the rotor by using a position detector physically attached to the axle or through the tension induced in the coils by the magnet, in order to
10 correctly control actuation by the control system. The present invention is also directed to a system for controlling electric motors and an electric motor system.

 The objective of the present invention is to prevent one or more switches of the three-phase inverting bridge from being actuated at an improper time, what can lead to the generation of high currents which cannot be detected by the current
15 detector, said currents may cause the auto-demagnetization of the rotor magnet, besides causing damages to the switches of said inverting bridge.

Description of the State of the Art

 The detection of the rotor position is required for the actuation of permanent magnet motors.

20 In accordance with the prior art to the present invention, such detection can be accomplished through sensors physically connected to the rotor ("hall", optical type, and the like) or by observing the voltages induced in the motor coils themselves, as described in Brazilian Patent Application PI 8805485, in such a way that the control may correctly select which phases of the motor will be activated every time.

25 As described in more details below, the control unit, when normally operating, analyzes the input of the position detector and current protection detector, thus activating the respective outputs in accordance with a predetermined table. However, if there is a failure in the position detector, it is likely that one or more switches of the three-phase inverting bridge is unduly activated, the result of which
30 can be the generation of high currents that are not detected by the current detector, thus resulting in the auto-demagnetization of the motor magnet and damages to the switches of the three-phase inverting bridge.

 As known, the demagnetization of the magnet makes it difficult to start the

motor, decreases the output and overheats the motor, being inadmissible in all the cases.

Still according to the prior art to this invention, the following measures to prevent the auto-demagnetization of the motor magnet are adopted: the design of a more robust motor, with an increased magnet thickness, what would increase notably the cost, specially in view of a larger magnet; the installation of a current protection detector in every switch or every phase of the motor, what would not only increase the cost but also the complexity of the system, by virtue of the higher number of detectors and signals for the control to analyze; or the simple elimination of the protection against auto-demagnetization, thus placing the integrity of the motor under the statistical possibility of the occurrence of a failure, what represents a serious risk not only for the system, but also for the image of the manufacturer.

Brief Description and Objects of the Invention

After a number of investigations, it was evidenced that, when normally operating and following the same rotation direction, the sequence where the positions of the rotor are updated in the sensor is always the same. Thus, such sequence can be predetermined, whereby the control unit of the system for controlling an motor could foresee the sequence where the positions of the rotor will be changed. By knowing the speed the motor is rotating at, it is possible to foresee the time when the position of the rotor will be changed.

With these information, the control unit can prevent failures when the motor is actuated, thus assuring the integrity of the rotor magnet and the inverting bridge switches.

In accordance with the teachings of the present invention, the control unit will accept only the position foreseen for the applicable rotation direction as valid, and always at the time expected for the present speed.

Preferably, when determining this time, a tolerance range defining a minimum time and a maximum time, during which a change in the position should take place, should be considered.

The present invention has the advantages, compared to the prior art, that it is not necessary to any oversize the rotor magnet, the cost and the complexity of the motor are decreased, and the current protection detector is simplified, besides conferring a greater reliability to the system.

Such advantages are attained through a method for controlling and protecting

electric motors provided with a rotor, specially permanent magnet motors electronically actuated by a control system comprising a three-phase inverting bridge, characterized by comprising the step of counting a first period of time, during which said rotor should be between an original position and the next position, and the step
5 of counting a second period of time that follows said the first period of time, during which said rotor should pass through said next position.

The present invention is also expressed as a system for controlling an electric motor provided with a rotor, specially a permanent magnet motor, comprising a three-phase inverted bridge and characterized by being additionally comprised of a
10 microcontroller capable of analyzing the positions of the rotor as a function of the time, associated with a counter capable of carrying out the step of counting a first period of time, during which said rotor should be between an original position and the next position, and the step of counting a second period of time subsequent said first period of time, during which said rotor should pass through said next position, as well
15 as an electric motor system comprising a control system, an electric motor electronically actuated by the control system, and characterized by being additionally comprised of ~~a microcontroller capable of analyzing the positions of the rotor as a~~ function of the time, associated with a counter capable of carrying out the step of counting a first period of time, during which said rotor should be between an original
20 position and the next position, and the step of counting a second period of time that follows said first period of time, during which said rotor should pass through said next position.

Brief Description of the Drawings

The present invention will be described below in more details with reference to
25 the accompanying drawings, wherein:

Figure 1 represents a block diagram of an electric motor system electronically actuated by a control system;

Figure 2 is a schematic representation of a three-phase inverting bridge;

Figure 3 is a three-phase inverting bridge actuation table; and

30 Figure 4 is a generic flowchart of a method for controlling and protecting electric motors that incorporates the teachings of this invention.

Detailed Description of the Invention

With reference to Figures 1 and 2, an electric motor system 1 is electronically actuated by a control system 2 comprising a rectifying bridge 3 basically, a capacitive

filter 4, a three-phase inverting bridge 5, a three-phase motor provided with a permanent magnet rotor 10, a control unit 11, position detectors SA, SB and SC, and a current protection detector PI.

As known in the state of the art, the control unit 11 is responsible for the monitoring of the position detectors SA, SB and SC and the current protection detector PI in order to excite, through the respective outputs, the switches T1 through T6 of the three-phase inverting bridge 5 at a suitable time in accordance with the table illustrated in Figure 3.

Thus, in response to the command of the control unit 11, the three-phase inverting bridge 5 will also apply a current to the coils of the motor 10 at the right time.

As already mentioned, in the event there is any failure in the position detectors SA, SB and SC, it is possible that one or more switches T1 through T6 of the three-phase inverting bridge 5 is not properly activated, what can generate high currents that are not detected by the current protection detector PI, resulting in the auto-demagnetization of the motor and damages to the switches T1 through T6 of the three-phase inverting bridge 5.

In accordance with the teachings of the present invention, the control system 2 also includes a microcontroller (not-shown) capable of analyzing the positions of the rotor as a function of the time, associated with a counter capable of carrying out successive steps of time counting. As known in the art, such counter may be an internal component of said microcontroller.

Said counter is set to zero whenever there is a change in the position of the rotor of the electric motor 10, the counting of a first period of time is started, during which period the rotor should be between a position and another one. Later on, the counting of a second period of time is started, during which time the rotor should pass through the next position.

In a three-phase motor with two poles there are six basic positions P1 through P6 of the rotor as shown in Figure 3, which positions should be successively reached by the rotor during a respective second period of time.

If the rotor passes through one of the positions during said first period of time, what would be too early, or after said second period of time has elapsed, what would be too late, it means that there has been some error, and then said microcontroller turns off the control system 2 in order to prevent further damages, thus preserving

the integrity of the rotor magnet and the switches of the three-phase inverting bridge.

If the rotor pass through the correct position during said second period of time, the microcontroller will issue an output updating signal and restart the counter, preparing same for counting the first and second periods of time corresponding to the
5 next position where the rotor should pass through.

Of course, if the rotor, during said second period of time, passes through a position that is not the correct one, it also means that there has been some error, and then said microcontroller turns off the control system 2.

Figure 4 represents a generic flowchart of a method for controlling and
10 protecting electric motors to exemplify the present invention.

In accordance with the specific teachings of this invention, said second period of time should include a tolerance for the moment the rotor passes through a given position. As an example, in a three-phase motor with two poles rotating at 3,000 rpm, the rotor takes 20 ms to complete one turn, and thus it shall consume 3.3 ms for
15 passing through each position.

In order to come up with said tolerance, said second period of time measured by the counter should include a first head range of 1.65 ms ($x/2$) and a second tail range of 6.6 ms ($2x$) beyond the regular 3.3 ms, what represents a tolerance of $x-50\%$ and $x+100\%$.

20 After a preferred example of realization has been described, it should be understood that the scope of the present invention encompasses other possible variations, being limited only by the contents of the appended claims including the possible equivalents.

CLAIMS

1- A method for controlling and protecting electric motors (10) provided with a rotor, specially permanent magnet motors electronically actuated by a control system (2) comprising a three-phase inverting bridge (5), characterized by comprising a step
5 of counting a first period of time, during which said rotor should be between an original position and the next position and a step of counting a second period of time that follows said first period of time, during which said rotor should pass through said next position.

2- The method in accordance with claim 1, characterized by comprising an
10 additional step of issuing an error signal if said rotor passes through said next position before or after said second period of time, or an output updating signal to restart a counter in the event the rotor passes through said next position during said second period of time.

3- The method in accordance with claim 2, characterized by comprising an
15 additional step of issuing an error signal if said rotor passes, during said second period of time, through a position other than the one that follows said original position.



4- The method in accordance with claim 2 or 3 characterized in that the control system 2 may be turned off through said error signal.

20 5- A control system (2) for an electric motor (10) provided with a rotor, specially a permanent magnet motor, comprising a three-phase inverting bridge (5) and characterized by being additionally comprised of a microcontroller capable of analyzing the positions of the rotor as a function of the time, associated with a counter capable of carrying out the step of counting a first period of time, during
25 which said rotor should be between an original position and the next position, and the step of counting a second period of time that follows said first period of time, during which said rotor should pass through said next position.

6- An electric motor system 1 comprising a control system (2), an electric motor (10) electronically actuated by the control system 2, and characterized by
30 being additionally comprised of a microcontroller, capable of analyzing the positions of the rotor as a function of the time, associated with a counter capable of carrying out the step of counting a first period of time, during which said rotor should be between an original position and the next position, and the step of counting a second

period of time that follows said first period of time, during which said rotor should pass through said next position.

1/3

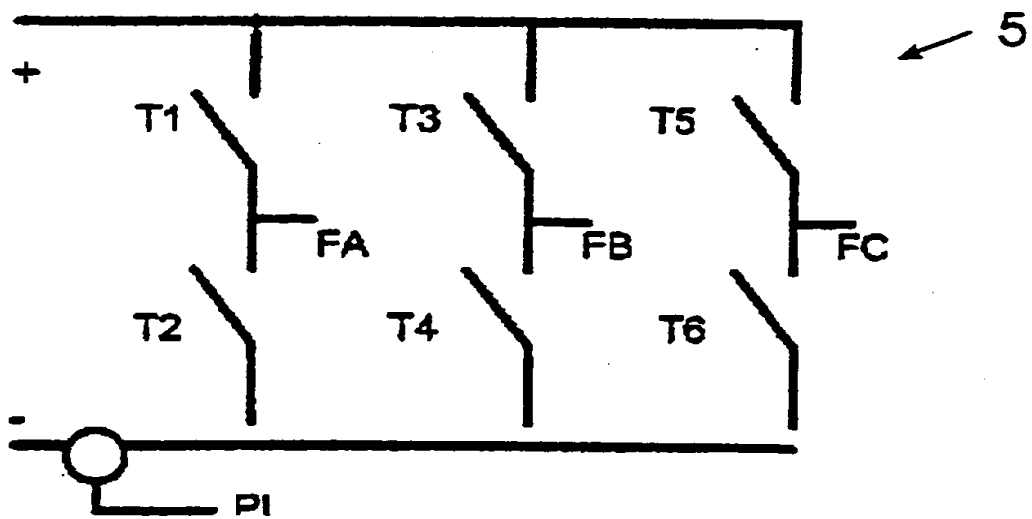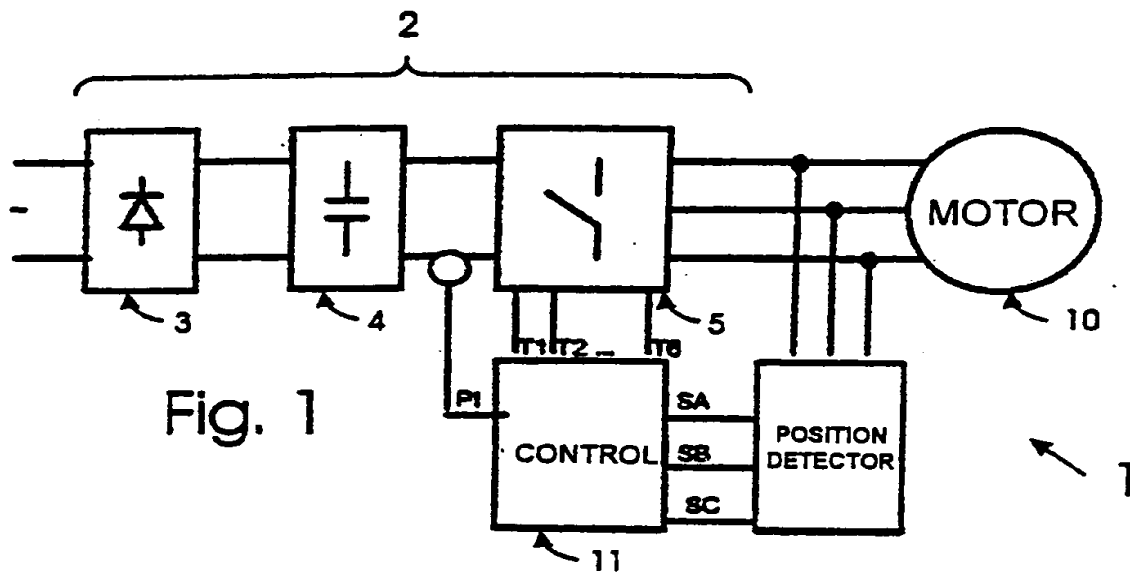

2/3

POSITION N.	INLET				OUTLET					
	POSITION DETECTOR			CURRENT / PI	SWITCH ACTUATION					
	SA	SB	SC		T6'	T5'	T4'	T3'	T2'	T1'
P1	1	0	1	0	0	0	1	0	0	1
P2	1	0	0	0	1	0	0	0	0	1
P3	1	1	0	0	1	0	0	1	0	0
P4	0	1	0	0	0	0	0	1	1	0
P5	0	1	1	0	0	1	0	0	1	0
P6	0	0	1	0	0	1	1	0	0	0
X	X	X	X	1	0	0	0	0	0	0

Fig. 3

3/3

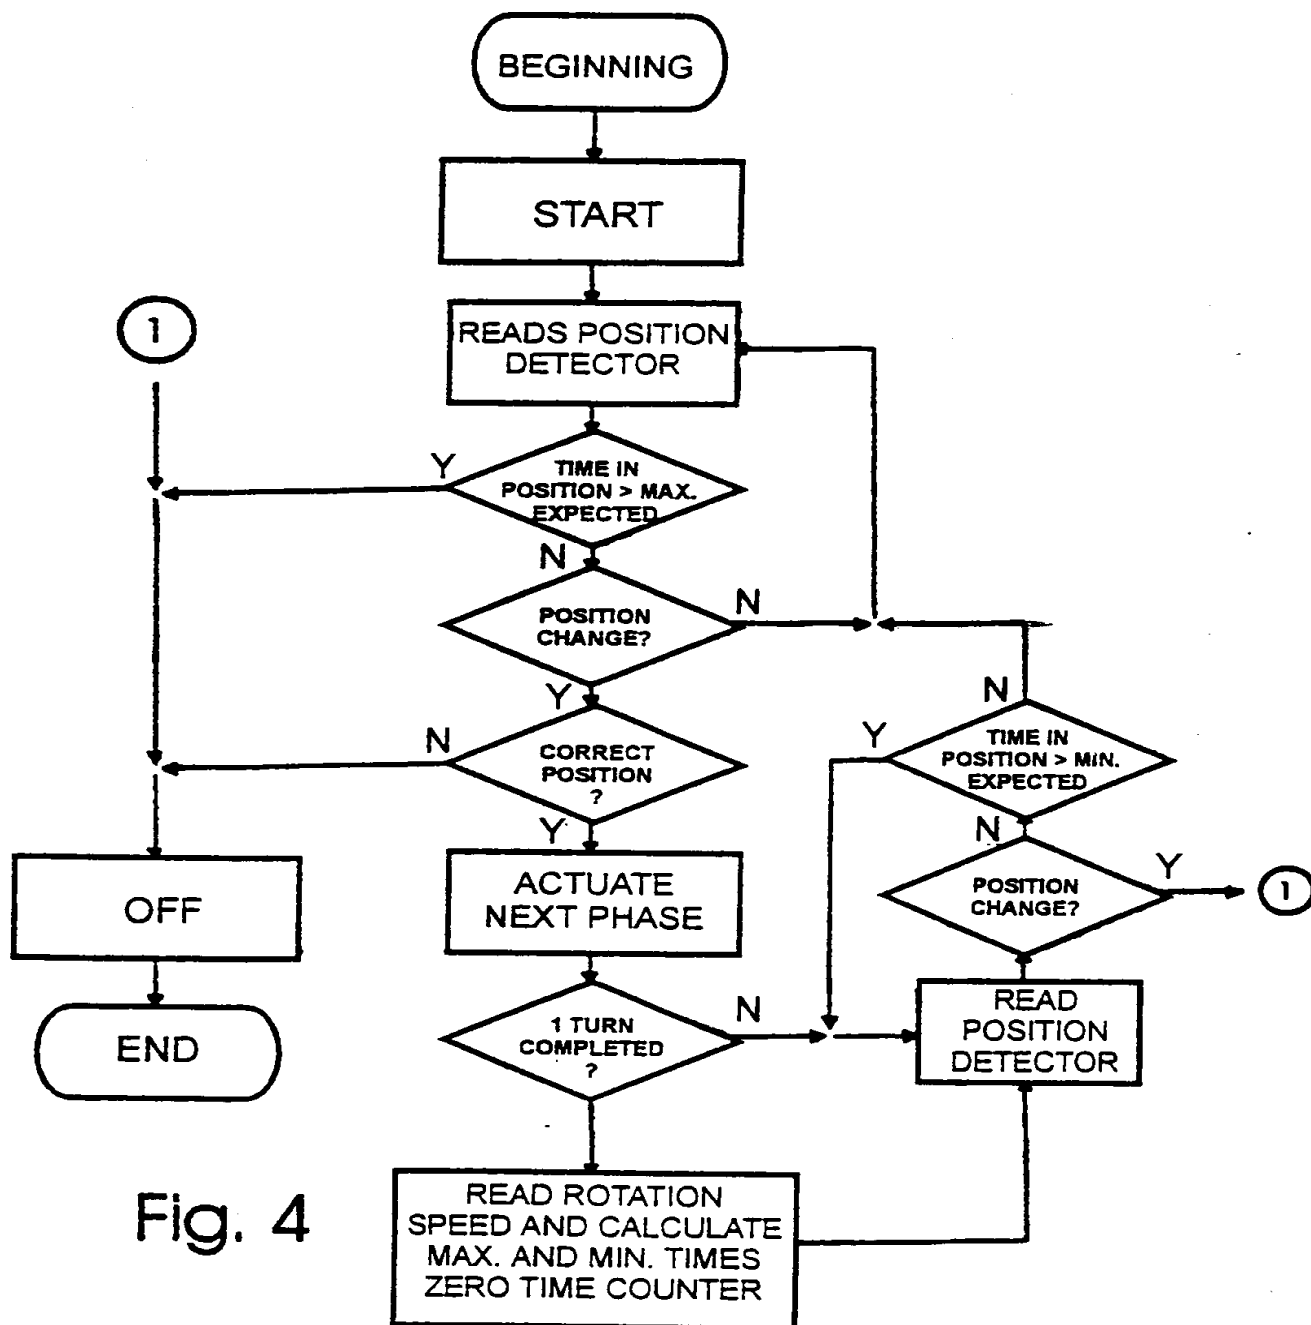


Fig. 4

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/BR 00/00105

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H02P6/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H02P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 532 461 A (CROOK JAMES C) 30 July 1985 (1985-07-30) column 1, line 29 - line 34; claims 1,2 column 5, line 35 - line 37	1-6
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 02, 30 January 1998 (1998-01-30) -& JP 09 261991 A (FUJITSU GENERAL LTD), 3 October 1997 (1997-10-03) abstract	1-6

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

11 January 2001

Date of mailing of the international search report

22/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Roy, C

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/BR 00/00105

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4532461	A	30-07-1985	NONE	
JP 09261991	A	03-10-1997	NONE	